
DR40RF-FR-WH

4 inch LED Fire-rated Slim Recessed downlight



Job Inform	ation	
Project Name		Type
Location		
Quantity		Date
Contact/ Name		
Notes		

Body

- · Durable airtight aluminum
- · White polycarbonate diffuser lens for low glare

LED Characteristics

- 9-Watt LED Module
- Minimal heat emission
- Up to 800 Lumens
- · Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

Dimming

- 10%-100% dimming capability
 Compatible with industry TRIAC/ELV dimmers (contact factory for compatible dimmers list)

Environment

- · Suitable for wet locations
- · Suitable for insulated ceiling application
- · Can be installed indoor and for outdoor applications

- · Included two springs loaded cilps to attach to any ceilling material
- The slim profile allow to be mounted under joists or
- Easier intallation with 4 1/4" round back

Description

• DR40RF-FR, a 9watt 4-inch All CCT slim profile round flat LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for wet location and use

Beam Spread

• 110 degree beam spread

LED Driver

- Extruded aluminum junction box with integrated 210mA dimmable driver included
- Class II electronic LED driver with 100-125V AC input;
- includeds an 12" cable from driver to fixture

Quick Connect Push-in Terminals

"Quick Connect" Push-in terminals for fast and easy

Operating Temperature

• -20°C - 40°C (-4°F - 104°F)
























SPECIFICATION			
Application	Ceiling Recessed Mount	Energy Star	YES
Approved Location	Wet	Input	100-125V AC, 60Hz, 0.09A
Beam Angle	110	LM 79	YES
ССТ	2700K/3000K/3500K/4000K/5000K	LM 80	YES
Certification	cETLus	Lumens	Up to 800
Class II	YES	Lumens per Watt	88.89
Color	White/Black/Brushed Nickel	Power Factor	>0.95
CRI	90+	Projected Life	5 Years
Dimming	YES	Wattage	9 Watt
Dimming Tech	TRIAC/ELV	Cut-Size	4 1/4"

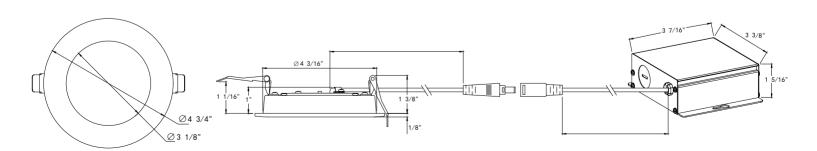

T: 905-669-1966 F: 905-851-5262

E: sales@zotia.ca W: www.dawnray.ca