

# DR40RG-FR-WH

## 4 inch LED Fire-rated Gimbal Slim Recessed downlight

DR	SIZE	SHAPE	FEATURE	COLOR
	40 : 4"	RG :Round	FR Fire Rated AG Anti Glare	WH : White
	20 : 2"	RG :Round		WH : White
	30 : 3"			BK : Black
	40 : 4"			SN : Silver
	40 : 4"	SG :Square		WH : White
				BK : Black
				SN : Silver

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Name		
Notes		

### Body

- Durable airtight aluminum
- White polycarbonate diffuser lens for low glare

### LED Characteristics

- 9-Watt LED Module
- Minimal heat emission
- Up to 850 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

### Dimming

- 10%-100% dimming capability
- Compatible with industry TRIAC/ELV dimmers (contact factory for compatible dimmers list)

### Environment

- Suitable for wet locations
- Suitable for insulated ceiling application
- Can be installed indoor and for outdoor applications

### Mounting

- Included two springs loaded clips to attach to any ceiling material
- The slim profile allow to be mounted under joists or dock work
- Easier installation with 4 1/4" round back

### Description

- DR40RG-FR, a 9 watt 4-inch All CCT slim profile round flat LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for wet location and use in soffits.

### Beam Spread

- 38 degree beam spread

### LED Driver

- Extruded aluminum junction box with integrated 210mA dimmable driver included
- Class II electronic LED driver with 100-125V AC input;
- includes an 12" cable from driver to fixture

### Quick Connect Push-in Terminals

- Three "Quick Connect" Push-in terminals for fast and easy wiring





### Operating Temperature

- -20°C - 40°C (-4°F - 104°F)



## SPECIFICATION

Application	Ceiling Recessed Mount	Energy Star	YES
Approved Location	Wet	Input	100-125V AC, 60Hz, 0.09A
Beam Angle	38	LM 79	YES
CCT	2700K/3000K/3500K/4000K/5000K	LM 80	YES
Certification	cETLus	Lumens	Up to 850
Class II	YES	Lumens per Watt	94.44
Color	White/Black/Brushed Nickel	Power Factor	>0.95
CRI	90+	Projected Life	5 Years
Dimming	YES	Wattage	9 Watt
Dimming Tech	TRIAC/ELV	Cut-Size	4 1/4"

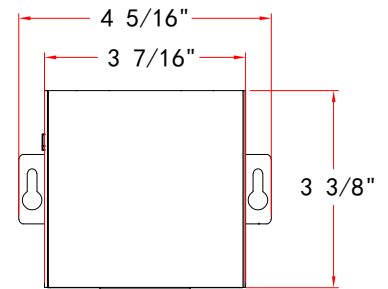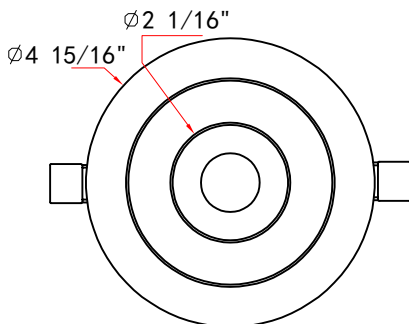

Zotia International Trade Ltd.  
201 Rowntree Dairy Road  
Woodbridge, ON, L4L 8B8

T: 905-669-1966  
F: 905-851-5262

E: sales@zotia.ca  
W: www.dawnray.ca