

DR20RB-WH/BK/SN

2 inch 5CCT LED Baffle Recessed downlight(Air tight)





Body

 Durable airtight aluminum Adjustable Baffle

LED Characteristics

- 7-Watt LED Module
- · Minimal heat emission
- Up to 500 Lumens
- Superior LED Performance and lifespan
- · Excellent Color rendering with Spotlight

Dimming

- 10%-100% dimming capability
- · Compatible with industry TRIAC/ELV dimmers (contact factory for compatible dimmers list)

Environment

- Suitable for wet locations
- Suitable for insulated ceiling application
- · Can be installed indoor and for outdoor applications

Mounting

Included two springs loaded cilps to attach to any ceilling

Description

• DR20RB, a 7watt 2-inch All CCT round baffle LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for wet location and use

Beam Spread

• 15 degree beam spread

LED Driver

- Extruded aluminum junction box with integrated 210mA dimmable driver included
- · Class II electronic LED driver with 100-125V AC input;
- includeds an 12" cable from driver to fixture

Quick Connect Push-in Terminals

"Quick Connect" Push-in terminals for fast and easy

Operating Temperature





















SPECIFICATION Application

Approved Location Wet

Beam Angle 15

2700K/3000K/3500K/4000K/5000K CCT


Certification cETLus YES Class II

Color White/Black/Brushed Nickel


CRI 90+ YES Dimming **Dimming Tech**


TRIAC/ELV

Energy Star	YES
Input	100-125V AC, 60Hz, 0.09A
LM 79	YES
LM 80	YES
Lumens	Up to 500
Lumens per Watt	71.43
Power Factor	>0.95
Projected Life	5 Years
Wattage	7 Watt
Cut-Size	2 1/2"

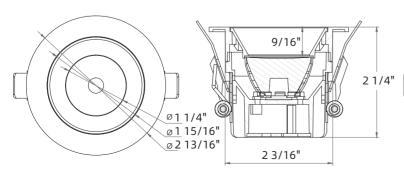

Ceiling Recessed Mount







Zotia International Trade Ltd. 201 Rowntree Dairy Road **DawnRay** Woodbridge, ON, L4L 8B8

T: 905-669-1966 F: 905-851-5262

E: sales@zotia.ca W: www.dawnrav.ca