

# DR04FR-WH/BK/SN

4 inch LED Round Ultra Slim Recessed downlight(Air tight)

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Name		
Notes		

## Body

- Durable airtight aluminum
- White polycarbonate diffuser lens for low glare

## LED Characteristics

- 9-Watt LED Module
- Minimal heat emission
- Up to 780 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

## Dimming

- 10%-100% dimming capability
- Compatible with industry TRIAC/ELV dimmers

## Environment

- Suitable for wet locations
- Suitable for insulated ceiling application
- Can be installed indoor and for outdoor applications

## Mounting

- Included two springs loaded clips to attach to any ceiling material
- The slim profile allow to be mounted dock work

## Description

- DR04FR, a 9 watt 4-inch 5CCT slim profile round flat LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for wet location and use in soffits.

## Beam Spread

- 110 degree beam spread

## LED Driver

- Extruded junction box with integrated 210mA dimmable driver included
- Class II electronic LED driver with 100-125V AC input; includes an 12" cable from driver to fixture

## Quick Connect Push-in Terminals

- Three "Quick Connect" Push-in terminals for fast and easy wiring

## Operating Temperature


- -20°C - 40°C (-4°F - 104°F)



## SPECIFICATION

Application	Ceiling Recessed Mount	Energy Star	YES
Approved Location	Wet	Input	100-125V AC, 60Hz, 0.09A
Beam Angle	110	LM 79	YES
CCT	2700K/3000K/3500K/4000K/5000K	LM 80	YES
Certification	cETLus	Lumens	Up to 780
Class II	YES	Lumens per Watt	86.67
Color	White/Black/Brushed Nickel	Power Factor	>0.95
CRI	90+	Projected Life	5 Years
Dimming	YES	Wattage	9 Watt
Dimming Tech	TRIAC/ELV	Cut-Size	4 1/4"

CCT	LUMENS
2700K	650LM
3000K	700LM
3500K	730LM
4000K	750LM
5000K	780LM

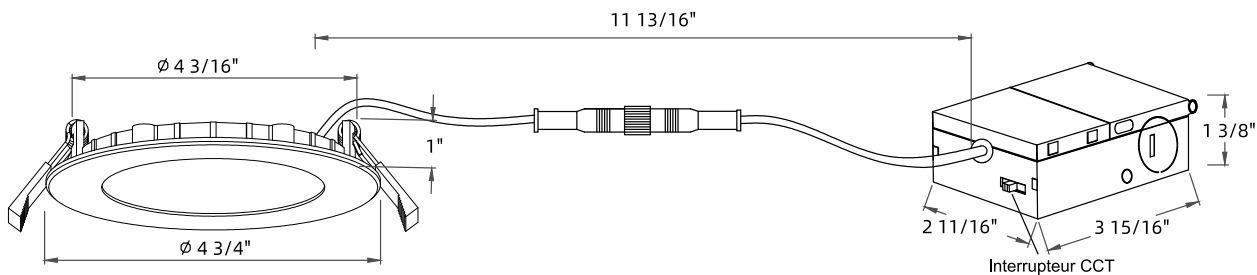

2450 Morningside Ave #2,  
Scarborough, ON M1X 0E2

E: sales@zotia.ca  
W: www.dawnray.space

T: (416) 297-5666