
# DR35SB-WH

# 3.5 inch 5CCT LED Baffle Recessed downlight(Air tight)



Body • Durable airtight aluminum White polycarbonate diffuser lens for low glare

#### LED Characteristics

- 12-Watt LED Module
- Minimal heat emission Up to 1060 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

#### Dimming

- 10%-100% dimming capability
  Compatible with industry TRIAC/ELV dimmers (contact factory for compatible dimmers list)

#### Environment

- Suitable for wet locations
- Suitable for insulated ceiling application · Can be installed indoor and for outdoor applications

#### Mounting

- Included two springs loaded cilps to attach to any ceilling material
- The slim profile allow to be mounted dock work

4 3/8"

#### Description

 DR35SB, a 12 watt 3.5 inch All CCT square baffle LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for wet location and use in soffits.

# Beam Spread

· 38 degree beam spread

#### LED Driver

Extruded junction box with integrated 210mA

- dimmable driver included
- Class II electronic LED driver with 100-125V AC input;
  includeds an 12" cable from driver to fixture

## **Quick Connect Push-in Terminals**

• Three "Quick Connect" Push-in terminals for fast and easy wiring


# **Operating Temperature**

-20°C - 40°C (-4°F - 104°F )

### Project Туре Name Location Date Quantity Contact/ Name Notes



| SPECIFICATION     |                               |                 |                          | ССТ   | LUMENS |
|-------------------|-------------------------------|-----------------|--------------------------|-------|--------|
| Application       | Ceiling Recessed Mount        | Energy Star     | YES                      | 2700K | 950LM  |
| Approved Location | Wet                           | Input           | 100-125V AC, 60Hz, 0.09A | 3000K | 980LM  |
| Beam Angle        | 38                            | LM 79           | YES                      | 3500K | 1030LM |
| ССТ               | 2700K/3000K/3500K/4000K/5000K | LM 80           | YES                      | 4000K | 1060LM |
| Certification     | cETLus                        | Lumens          | Up to 1060               | 5000K | 1045LM |
| Class II          | YES                           | Lumens per Watt | 88.3                     |       |        |
| Color             | White                         | Power Factor    | >0.95                    |       |        |
| CRI               | 90+                           | Projected Life  | 5 Years                  |       |        |
| Dimming           | YES                           | Wattage         | 12 Watt                  |       |        |
| Dimming Tech      | TRIAC/ELV                     | Cut-Size        | 3 1/2"                   |       |        |

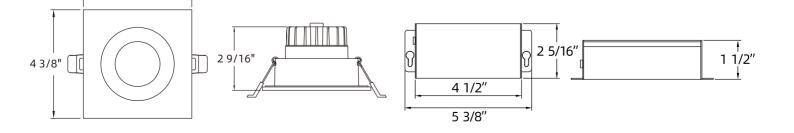



E: sales@zotia.ca

T: (416) 297-5666