

DR20RG-WH/BK/SN

2.5 inch LED Round Gimbal Ultra Slim Recessed downlight(Air tight)

DR	SIZE		SHAPE		FEATURE		COLOR	
	40	: 4"	RG	:Round	FR	:Fire Rated	WH	: White
					AG	:Anti Glare		
	20	: 2"	RG	:Round			WH	: White
	30	: 3"					BK	: Black
	40	: 4"					SN	: Silver
	60	: 6"					WH	: White
	40	: 4"	SG	:Square			WH	: White
							BK	: Black
							SN	: Silver

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/ Name		
Notes		

Body

- Durable airtight aluminum
- White polycarbonate diffuser lens for low glare

LED Characteristics

- 5-Watt LED Module
- Minimal heat emission
- Up to 400 Lumens
- Superior LED Performance and lifespan
- Excellent Color rendering with Spotlight

Dimming

- 10%-100% dimming capability
- Compatible with industry TRIAC/ELV dimmers (contact factory for compatible dimmers list)

Environment

- Suitable for wet locations
- Suitable for insulated ceiling application
- Can be installed indoor and for outdoor applications

Mounting

- Included two springs loaded clips to attach to any ceiling material
- The slim profile allow to be mounted dock work

Description

- DR20RG, a 5watt 2.5-inch All CCT slim profile round flat LED panel is a high-performance, easy to install downlight. It offers excellent light output, energy efficiency, and streamlined design. Suitable for wet location and use in soffits.

Beam Spread

- 25 degree beam spread

LED Driver

- Extruded aluminum junction box with integrated 210mA dimmable driver included
- Class II electronic LED driver with 100-125V AC input;
- includes a 12" cable from driver to fixture

Quick Connect Push-in Terminals

- Three "Quick Connect" Push-in terminals for fast and easy wiring





Operating Temperature

- -20°C ~ 40°C (-4°F ~ 104°F)



SPECIFICATION

Application	Ceiling Recessed Mount	Energy Star	YES
Approved Location	Wet	Input	100-125V AC, 60Hz, 0.09A
Beam Angle	25	LM 79	YES
CCT	2700K/3000K/3500K/4000K/5000K	LM 80	YES
Certification	cETLus	Lumens	Up to 400
Class II	YES	Lumens per Watt	88.9
Color	White/Black/Brushed Nickel	Power Factor	>0.95
CRI	90+	Projected Life	5 Years
Dimming	YES	Wattage	5 Watt
Dimming Tech	TRIAC/ELV	Cut-Size	2 3/4"

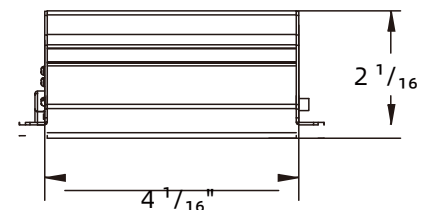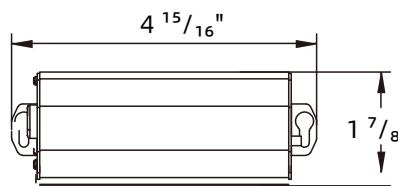

2450 Morningside Ave #2,
Scarborough, ON M1X 0E2

E: sales@zotia.ca
W: www.dawnray.space

T: (416) 297-5666